

Garmin International, Inc.
1200 E. 151st Street
Olathe, Kansas 66062 U.S.A.

FAA APPROVED

AIRPLANE FLIGHT MANUAL SUPPLEMENT
or
SUPPLEMENTAL AIRPLANE FLIGHT MANUAL
for the
Garmin GPS 175/GNX 375/GNC 355 GPS/XPDR/COM Navigation System

as installed in

Cessna F172M

Make and Model Airplane

Registration Number: OY-BUM Serial Number: F17201468

This document serves as an Airplane Flight Manual Supplement or as a Supplemental Airplane Flight Manual when the aircraft is equipped in accordance with Supplemental Type Certificate SA02636SE for the installation and operation of the Garmin GPS 175, GNC 355, or GNX 375 GPS/COM/XPDR Navigation System. This document must be incorporated into the FAA Approved Airplane Flight Manual or provided as an FAA Approved Supplemental Airplane Flight Manual.

The information contained herein supplements the information in the FAA Approved Airplane Flight Manual. For limitations, procedures, loading and performance information not contained in this document, refer to the FAA Approved Airplane Flight Manual, markings, or placards.

FAA Approved by: _____



JR Brownell
ODA STC Unit Administrator
Garmin International, Inc.
ODA-240087-CE

Date: 3/3/2020

LOG OF REVISIONS

Revision Number	Page		Description	FAA Approved
	Date	Number		
1	03/22/19	All	Complete Supplement	<i>JR Brownell</i> ODA STC Unit Administrator Garmin International, Inc. ODA-240087-CE Date : <u>03/22/2019</u>
2	07/25/19	Through out Page 20 Page 34 Page 36 Page 37	Added information for GNC 355. Updated Software Versions Removed Narco 4 and 5 Indicators. Updated Pilot Guide references Added circuit breaker label for GNC 355	<i>JR Brownell</i> ODA STC Unit Administrator Garmin International, Inc. ODA-240087-CE Date : <u>07/25/2019</u>
3	03/05/20	Page 3 Page 19 Page 21 Page 25 Page 37 Page 46	Added new FIS-B Weather Products Updated RAIM check wording. Updated software versions table Added Database Sync Exception to Database Updates Updated revision of Pilot's Guide Added Database Sync Discussion	<u>See page i</u>

Table of Contents

SECTION	PAGE
Section 1. General	1
1.1 Garmin GPS 175/GNC 355/GNX 375 Navigators	1
1.2 System Capabilities	5
1.3 GNSS (GPS/SBAS) Navigation system Equipment approvals	5
1.4 Definitions	15
Section 2. LIMITATIONS	17
2.1 Kinds of Operation	17
2.2 Minimum Equipment	17
2.3 ADS-B Out	18
2.4 Pressure Altitude Broadcast Inhibit (PABI)	18
2.5 Flight Planning	19
2.6 System Use	20
2.7 Applicable System Software	21
2.8 Navigation Database	21
2.9 Ground Operations	21
2.10 Instrument Approaches	22
2.11 RF Legs	23
2.12 Autopilot Coupling	23
2.13 Terrain Alerting Function	24
2.14 Polar Operations	24
2.15 ADS-B Weather (Optional for GPS 175/GNC355)	24
2.16 Traffic Display (Optional for GPS 175/GNC355)	24
2.17 Flight Planner/Calculator Functions	25
2.18 Glove Use / Covered Fingers	25
2.19 Demo Mode	25
2.20 Wire Obstacle Database	25
2.21 Portable Electronic Devices	25
2.22 Database Updates	25
2.23 OBS Mode	25
2.24 Advisory Visual Approaches	25
2.25 Placards	26
Section 3. EMERGENCY PROCEDURES	27
3.1 Emergency Procedures	27
3.2 Abnormal Procedures	28
Section 4. NORMAL PROCEDURES	31
4.1 Unit Power On	31
4.2 Before Takeoff	31
4.3 HSI and EHSI Operation	32
4.4 Autopilot Operation	32
4.5 Coupling the Autopilot during approaches	34
4.6 Composite Indicators	35

Section 5. PERFORMANCE	36
Section 6. WEIGHT AND BALANCE	36
Section 7. SYSTEM DESCRIPTIONS	37
7.1 Pilot's Guide	37
7.2 Leg Sequencing	37
7.3 Terrain Alerting	37
7.4 Traffic System (Optional for GPS 175/GNC355)	38
7.5 Power	38
7.6 Databases and Flight Plan Waypoints/Procedures	39
7.7 External Switches	39
7.8 Airspace Depiction and Alerts	40
7.9 ADS-B Traffic (Optional for GPS 175/GNC355)	41
7.10 Transponder Control (GNX 375 Only)	42
7.11 Depiction of Obstacles and Wires	42
7.12 Flight Stream 510 (Optional)	43
7.13 Built in Bluetooth	43
7.14 Map Page	44
7.15 Flight Plan Depiction	44
7.16 User Defined Waypoints	44
7.17 Times and Distances	44
7.18 Direct-To Operations	44
7.19 European Visual Reporting Points	44
7.20 Advisory Visual Approaches	45
7.21 Composite CDIs	45

Section 1. General

1.1 Garmin GPS 175/GNC 355/GNX 375 Navigators

The Garmin GPS 175/GNC 355/GNX 375 navigation system is a GPS system with a Satellite Based Augmentation System (SBAS) and optional transponder, comprised of a Garmin TSO-C146e navigator and a Garmin approved GPS/SBAS antenna(s). The GPS 175/GNC 355/GNX 375 navigation system is installed in accordance with AC 20-138D.

The GNX 375 also contains an ADS-B In/Out transponder capable of 1090ES out and UAT/1090 In. The transponder is a radio transmitter/receiver that operates on radar frequencies, receiving ground radar or TCAS interrogations at 1030 MHz and transmitting a coded response of pulses to ground-based radar on a frequency of 1090 MHz. Each unit is equipped with IDENT capability to initiate the SPI (special position identification) pulse for 18 seconds and will reply to ATRCBS Mode A, Mode C, and Mode S All-Call interrogation.

The GNC 355(A) is a GPS 175 with an integrated com radio with either 8.33 or 25 kHz spacing.

	GPS 175	GNC 355	GNC 355A	GNX 375
GPS SBAS Navigation: <ul style="list-style-type: none"> • Oceanic, enroute, terminal, and non-precision approach guidance • Precision approach guidance (LP, LPV) 	X	X	X	X
Moving map including topographic, terrain, aviation, and geopolitical data	X	X	X	X
Display of FIS-B weather products (optional for GPS 175 / GNC 355)	X	X	X	X
Display of ADS-B traffic data (optional for GPS 175 / GNC 355)	X	X	X	X
Built in transponder with 1090ES out, and 1090/UAT In				X
Visual Terrain Alerting	X	X	X	X
Supplemental calculators and timers	X	X	X	X
Control of Flight Stream 510 (optional)	X	X	X	X
25 kHz Com Radio		X		
8.33 kHz Com Radio			X	

Table 1 – GPS 175/GNC 355/GNX 375 Functions

The GPS navigation functions and optional transponder and navigation radio functions are operated by dedicated hard keys, a dual concentric rotary knob, or the touchscreen.

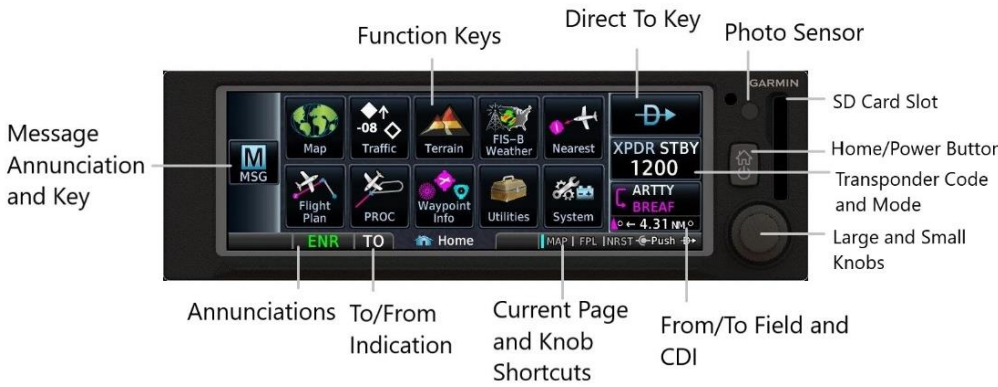


Figure 1 - GNX 375 Control and Display Layout

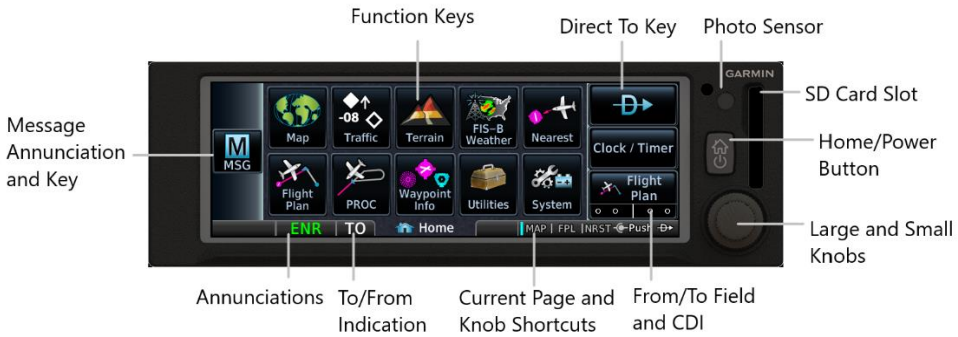


Figure 2 – GPS 175 Control and Display Layout



Figure 3 – GNC 355 Display Layout

The GNX 375 transponder transmits ADS-B Out data on 1090 extended squitter (1090 MHz). It integrates data from internal and external sources to transmit the following data per 14 CFR 91.227:

- GPS Position, Altitude, and Position Integrity
- Ground Track and/or Heading, Ground Speed, and Velocity Integrity
- Air Ground Status
- Flight ID, Call Sign, ICAO Registration Number
- Capability and Status Information
- Transponder Squawk Codes between 0000-7777.
- Emergency Status
- IDENT - initiates SPI (special position identification) pulse for 18 seconds

The transponder also receives ADS-B In data on 1090 MHz, including ADS-B and ADS-R Data. ADS-B is data directly from another transmitting aircraft, and the ADS-R data which is rebroadcasted ADS-B data from a ground station. The transponder also includes ADS-B In data on UAT (978 MHz). UAT In data includes ADS-B, ADS-R, TIS-B, and FIS-B data. TIS-B Data is a broadcast of secondary surveillance radar (SSR) derived traffic information from ground stations, and FIS-B data is broadcast of aviation data from a ground station. FIS-B data includes the following products:

- Graphical and textual weather products
 - NEXRAD
 - PIREPs
 - G AIRMETs
 - METARs
 - TAFs
 - Winds Aloft
 - Lightning
 - Icing
 - Turbulence
 - Center Weather Advisories
- Aviation Data
 - TFRs
 - NOTAMs

The transponder provides ADS-B traffic information and alerting to the pilot. The

alerting includes aural and visual traffic alerting information on the display, as well as on interfaced displays where supported.

1.2 System Capabilities

This Flight Manual Supplement documents the installed capabilities of the GPS 175/GNC 355/GNX 375 specific to the aircraft for which this manual is created.

NOTE

In sections which contain a square checkbox (☐) the installer will have placed an “X” in the boxes next to the capabilities applicable to the installation.

The GPS 175/GNC 355/GNX 375 system and associated navigation interface in this aircraft have the following capabilities, in addition to the core multifunction display capability:

- Primary GPS Navigation (Enroute) and Approach Capability (LP/LNAV) – See below
- Primary GPS Approach Capability with Vertical Guidance (LNAV/VNAV, LPV) – See below
- Built in ADS-B In/Out Transponder (GNX 375)

1.3 GNSS (GPS/SBAS) Navigation system Equipment approvals

The Garmin GPS 175/GNC 355/GNX 375 navigator installed in this aircraft is a TSO-C145c Class 3 approved GPS navigator that complies with AC 20-138D. The Garmin GPS 175/GNC 355/GNX 375 system as installed in this aircraft is approved for navigation using GPS and GPS/SBAS (within the coverage of a Satellite Based Augmentation System complying with ICAO Annex 10) for IFR en route, terminal area, non-precision approach, and approach procedures with vertical guidance operations.

The Garmin GPS 175/GNC 355/GNX 375 system as installed in this airplane complies with the equipment, performance, and functional requirements to conduct RNAV operations in accordance with the following table. This table is accurate at the time it was published. However, changes to operational rules, FAA advisory circulars, flight plan formats, etc., are possible. The pilot is responsible to ensure compliance with current operational requirements.

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNAV 10 RNP 10 Oceanic and Remote Areas of Operation (Class II Navigation)	GNSS FDE availability must be verified prior to flight. Maximum predicted FDE unavailability is 34 minutes. ¹ Two GNSS systems required to be operational, (one GNSS system for those routes requiring only one long range navigation system). No time limit using GNSS as the primary navigation sensor. Part 91, Part 91 subpart K, 121, 125, and 135 operators require operational approval.	FAA AC 20-138D CHG 2, FAA AC 90-105A, FAA AC 91-70B, EASA AMC 20-12	R	A1	The GPS equipment as installed requires a second GNSS system for Class II navigation in oceanic and remote airspace. When installed with a second GNSS system, the GPS 175/GNC 355/GNX 375 equipment complies with the requirements for GPS primary means of Class II navigation in oceanic and remote airspace, when used in conjunction with an FDE prediction tool that satisfies the guidance of FAA AC 20-138D and AC 90-105A (or later revision). ¹ Additional equipment may be required to obtain operational approval to utilize RNP-10 performance.
B-RNAV / RNAV 5 (Europe)	This does not constitute an operational approval.	FAA AC 90-96A CHG 1, EASA AMC 20-4A	R	B2	
RNP 4 Oceanic and Remote Areas of Operation (Class II Navigation)	GNSS FDE availability must be verified prior to flight. Maximum predicted FDE unavailability is 25 minutes. ¹ Two operational long-range nav systems required, (or one navigation system and one GNSS sensor for those routes requiring only one	FAA AC 20-138D CHG 2, FAA AC 90-105A, FAA AC 91-70B	R	L1	The GPS equipment as installed requires a second GNSS system for Class II navigation in oceanic and remote airspace. Additional equipment may be required to obtain operational approval to utilize RNP-4 performance.

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
	<p>long-range navigation sensor).</p> <p>No time limit using GNSS as the primary navigation sensor.</p> <p>Part 91, Part 91 subpart K, 121, 125, and 135 operators require operational approval.</p>				
RNAV 2	<p>The GNSS RNAV system is installed and meets the performance and functional requirements of AC 90-100A.</p> <p>In accordance with AC 90-100A, CHG 2, Part 91 operators (except subpart K) following the aircraft and training guidance in AC 90-100A are authorized to fly RNAV 2 procedures.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2, FAA AC 90-100A CHG 2</p>	R	C2	Includes RNAV Q and T routes.

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNAV 1	<p>The GNSS RNAV system is installed and meets the performance and functional requirements of AC 90-100A.</p> <p>In accordance with AC 90-100A, Part 91 operators (except subpart K) following the aircraft and training guidance in AC 90-100A are authorized to fly RNAV 1 procedures.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2, FAA AC 90-100A CHG 2</p>	R	D2	Includes RNAV terminal departure, arrival procedures, and approach procedures up to the Final Approach Fix.
P-RNAV (Europe)	This does not constitute an operational approval.	<p>FAA AC 90-96A CHG 1, JAA TGL 10 Rev 1</p>	R	D2	ICAO flight plan code for P-RNAV no longer exists. P-RNAV utilizes RNAV 1 flight plan codes.

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNP 1	<p>When flying a RNP procedure containing an RF leg, the AFCS must be operational.</p> <p>At a minimum, the flight director must be displayed and utilized when conducting procedures containing radius-to-fix (RF) legs.</p> <p>In accordance with AC 90-105A, Part 91 operators (except subpart K), following the aircraft and training guidance in AC 90-105A are authorized to fly RNP 1 procedures.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2,</p> <p>FAA AC 90-105A</p>	R	O2	<p>Includes RNP terminal departure and arrival procedures, including procedures with radius-to-fix (RF) legs. Also includes approach procedures to the Final Approach Fix.</p> <p>AC 90-105A states that procedures with RF legs must be flown using either a flight director or coupled to the autopilot.</p> <p>Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See section 4.5 of this manual to determine if this capability is supported in this installation.</p>

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNP-2 (Oceanic / Remote)	<p>GNSS FDE availability must be verified prior to flight. Maximum predicted FDE unavailability is 5 minutes.¹</p> <p>Two operational long-range nav systems required, (or one navigation system and one GNSS sensor for those routes requiring only one long-range navigation sensor).</p> <p>No time limit using GNSS as the primary navigation sensor.</p> <p>Part 91, Part 91 subpart K, 121, 125, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG2, FAA AC 90-105A FAA AC 91-70B</p>	R	TBD	<p>The GPS equipment as installed requires a second GNSS system for Class II navigation in oceanic and remote airspace. Additional equipment may be required to obtain operational approval to utilize RNP-2 performance.</p> <p>Item 18 PBN flight plan code is still to-be-determined at time of publication of this AFMS.</p>
RNP-2 (Domestic / Offshore En route)	<p>In accordance with AC 90-105A, Part 91 operators (except subpart K) following the aircraft and training guidance in AC 90-105A are authorized to fly RNP-2 domestic and offshore routes.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2, FAA AC 90-105A FAA AC 91-70B</p>	R	TBD	<p>Includes RNP-2 domestic and offshore routes.</p> <p>Item 18 PBN flight plan code is still to-be-determined at time of publication of this AFMS.</p>

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNP APCH LNAV minima	<p>When flying a RNP procedure with a radius-to-fix (RF) leg, the AFCS must be operational. At a minimum, the flight director must be displayed and utilized when conducting procedures containing RF legs.</p> <p>In accordance with AC 90-105A, Part 91 operators (except subpart K), following the aircraft and training guidance in AC 90-105A are authorized to fly RNP APCH LNAV minima procedures. Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2, FAA AC 90-105A,</p> <p>EASA AMC 20-27A</p>	R	S1	<p>Includes non-precision approaches based on conventional navigation aids with “or GPS” in the title and area navigation approaches titled “GPS”, “RNAV-(GPS)”, and “RNAV (GNSS)”. This includes procedures with radius-to-fix (RF) legs.</p> <p>Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See section 4.5 of this manual to determine if this capability is supported in this installation.</p>

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
RNP APCH LNAV/VN AV minima	<p>When flying a RNP procedure with a radius-to-fix (RF) leg, the AFCS must be operational. At a minimum, the flight director must be displayed and utilized when conducting procedures containing RF legs.</p> <p>In accordance with AC 90-105A, Part 91 operators (except subpart K), following the aircraft and training guidance in AC 90-105A are authorized to fly RNP APCH LNAV/VNAV minima procedures. Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2, FAA AC 90-105A,</p> <p>EASA AMC 20-27A with CM-AS-002</p>	R	S2	<p>Includes area navigation approaches titled “RNAV (GPS)” and “RNAV (GNSS).” This includes procedures with radius-to-fix (RF) legs.</p> <p>Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See section 4.5 of this manual to determine if this capability is supported in this installation.</p>
RNP APCH LP minima	<p>When flying a RNP procedure with a radius-to-fix (RF) leg, the AFCS must be operational. At a minimum, the flight director must be displayed and utilized when conducting procedures containing RF legs</p> <p>In accordance with AC 90-107, Part 91 operators (except subpart K), following the</p>	<p>FAA AC 20-138D CHG 2,</p> <p>FAA AC 90-107</p>	N/A	N/A	<p>Includes area navigation approaches titled “RNAV (GPS)” and “RNAV (GNSS)” including procedures with radius-to-fix (RF) legs.</p> <p>LP minima are available only when within SBAS coverage.</p> <p>Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this</p>

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
	<p>aircraft and training guidance in AC 90-107 are authorized to fly RNP APCH LP minima procedures.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>				document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See section 4.5 of this manual to determine if this capability is supported in this installation.
RNP APCH LPV minima	<p>When flying a RNP procedure with a radius-to-fix (RF) leg, the AFCS must be operational. At a minimum, the flight director must be displayed and utilized when conducting procedures containing RF legs.</p> <p>In accordance with AC 90-107, Part 91 operators (except subpart K), following the aircraft and training guidance in AC 90-107 are authorized to fly RNP APCH LPV minima procedures.</p> <p>Part 91 subpart K, 121, 125, 129, and 135 operators require operational approval.</p>	<p>FAA AC 20-138D CHG 2,</p> <p>FAA AC 90-107,</p> <p>EASA AMC 20-28</p>	B	N/A	<p>Includes area navigation approaches titled “RNAV (GPS)” and “RNAV (GNSS)”, including procedures with radius-to-fix (RF) legs.</p> <p>LPV minima are available only when within SBAS coverage.</p> <p>Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See section 4.5 of this manual to determine if this capability is supported in this installation.</p>

Navigation Spec.	Operational Requirements/ Authorization	Reference Documents	ICAO Flight Plan Code		Notes
			Item 10a Code	Item 18 PBN/	
Advanced RNP See Notes for specific Advanced RNP functions.	This does not constitute an operational approval.	FAA AC 20-138D CHG 2, FAA AC 90-105A	N/A	N/A	<ul style="list-style-type: none"> • <u>RNAV Holding</u>: Supported. • <u>RF Legs</u>: Supported. • <u>Parallel Offsets</u>: RNP-4 parallel offsets as defined by AC 20-138D Chapter 10 are supported. • <u>Advanced RNP parallel offsets</u> as defined by AC20-138D Appendix 3 are supported. • <u>Higher Continuity</u>: Supported only when a second GNSS system is installed and operating. • <u>Scalable RNP</u>: Not supported. • <u>Fixed Radius Transitions (FRT)</u>: Not Supported • <u>Time of Arrival Control (TOAC)</u>: Not supported.

1. FDE/RAIM availability worldwide can be determined via the following:

- An FDE prediction tool that satisfies the guidance of FAA AC 20-138D and AC 90-105A (or later revision), such as the Garmin WFDE Prediction program, part number 006-A0154-01 or later approved version with GPS SW >= 3.0 selected

Also, within the United States:

- Via the FAA's RAIM Service Availability Prediction Tool (SAPT) website: <http://sapt.faa.gov>.
- Contacting a Flight Service Station (not DUATS) to obtain non-precision approach RAIM.

Within Europe,

- Using the Garmin WFDE Prediction program,
- An FDE prediction tool that satisfies the guidance of FAA AC 20-138D and AC 90-105A (or later revision)
- Europe's AUGER GPS RAIM Prediction Tool at <http://augur.ecacnav.com/augur/app/home>.

This requirement is not necessary if SBAS coverage is confirmed to be available along the entire route of flight. The route planning and WFDE prediction program may be downloaded from the Fly-Garmin website on the internet (fly.garmin.com/fly-garmin/support/). For information on using the WFDE Prediction Program, refer to GARMIN WAAS FDE Prediction Program, part number 190-00643-01, 'WFDE Prediction Program Instructions'.

Garmin International holds an FAA Type 2 Letter of Acceptance (LOA) in accordance with AC 20-153A for database integrity, quality, and database management practices for the Navigation database. Flight crews and operators can view the LOA status at FlyGarmin.com then select "Aviation Database Declarations".

Navigation information is referenced to the WGS-84 reference system.

1.4 Definitions

The following terminology is used within this document:

ADF:	Automatic Direction Finder
ADS-B:	Automatic Dependent Surveillance Broadcast
APR:	Approach
APPR:	Approach
CDI:	Course Deviation Indicator
DME:	Distance Measuring Equipment
ECAC:	European Civil Aviation Conference
EHSI:	Electronic Horizontal Situation Indicator
FIS-B:	Flight Information Services Broadcast
GNSS:	Global Navigation Satellite System
GPA:	Glidepath Angle
GPS:	Global Positioning System
GPSS:	GPS Roll Steering
HOT:	Hazardous Obstacle Transmission wires
HSI:	Horizontal Situation Indicator
IAP:	Instrument Approach Procedure
IFR:	Instrument Flight Rules
ILS:	Instrument Landing System
IMC:	Instrument Meteorological Conditions
LDA:	Localizer Directional Aid
LNAV:	Lateral Navigation
LNAV +V:	Lateral Navigation with advisory Vertical Guidance
L/VNAV:	Lateral/Vertical Navigation

LOC: Localizer
LOC-BC: Localizer Backcourse
LP: Localizer Performance
LPV: Localizer Performance with Vertical Guidance
LP +V: Localizer Performance with Advisory Vertical Guidance
MLS: Microwave Landing System
MMC: Multi-Media Card
NOTAM: Notice to Airmen
OBS: Omni Bearing Selector
PED: Portable Electronic Device
RAIM: Receiver Autonomous Integrity Monitoring
RF Leg: Radius-To-Fix Leg of a Charted Instrument Procedure
RNAV: Area Navigation
RNP: Required Navigational Performance
SBAS: Satellite Based Augmentation System
SD: Secure Digital
SDF: Simplified Directional Facility
SUSP: Suspend
TACAN: Tactical Air Navigation System
TAWS: Terrain Awareness and Warning System
TCH: Threshold Crossing Height
TFR: Temporary Flight Restriction
TIS: Traffic Information Service
VFR: Visual Flight Rules
VGSI: Visual Glide-Slope Indicator
VLOC: VOR/Localizer
VMC: Visual Meteorological Conditions
VOR: VHF Omnidirectional Range
VRP: Visual Reporting Point
WAAS: Wide Area Augmentation System
WFDE: WAAS Fault Data Exclusion

Section 2. LIMITATIONS

2.1 Kinds of Operation

This AFM supplement does not grant approval for IFR operations to aircraft limited to VFR operations. The following checkboxes indicate only if the navigator installation meets all STC requirements for VFR or IFR flight per the STC Installation Manual section 3.3.1.

- This GPS 175/GNC 355/GNX 375 navigator installation meets the STC requirements for VFR flight only
- This GPS 175/GNC 355/GNX 375 navigator installation meets the requirements for IFR flight

2.2 Minimum Equipment

The GPS 175/GNC 355/GNX 375 must have the following system interfaces fully functional in order to be used for primary navigation during IFR operations:

Interfaced Equipment	Number installed	Number Required for IFR
External HSI/CDI/EHSI	1 or more	1
External APPR and LOI Annunciator	See Note 1	1

Table 2 – Required Equipment

Note 1: Certain installations require an external APPR and LOI annunciator light. If installed, these annunciators must be fully functional to use the GPS 175/GNC 355/GNX 375 GPS navigation for IFR operations.

Single engine piston aircraft under 6,000 lbs. maximum takeoff weight:

Required Equipment for IFR operations utilizing GPS navigation: Single GPS 175/GNC 355/GNX 375 Navigator

All other aircraft:

Required Equipment for IFR operations utilizing GPS navigation: Single GPS 175/GNC 355/GNX 375 Navigator plus a second source of TSO-C146 approved GPS navigation or a separate source of VHF navigation.

Operation in remote or oceanic operation requires two sources of GPS navigation.

The GNX 375 must have the following system interfaces fully functional in order to be compliant with the requirements for 14 CFR 91.227 ADS-B Out operations:

Interfaced Equipment	Number Installed	Number Required
Uncorrected Pressure Altitude Source	1	1

Table 3 – Required Equipment

2.3 ADS-B Out

The GNX 375 only complies with 14 CFR 91.227 for ADS-B Out when all required functions are operational. When the system is not operational, ADS-B Out transmit failure messages will be present on the display interface.

2.4 Pressure Altitude Broadcast Inhibit (PABI)

Pressure Altitude Broadcast Inhibit shall only be enabled when requested by Air Traffic Control while operating within airspace requiring an ADS-B Out compliant transmitter. PABI is enabled by selecting the GNX transponder to ON mode.

2.5 Flight Planning

For flight planning purposes, in areas where SBAS coverage is not available, the flight crew must check RAIM availability. An acceptable means of compliance for FDE prediction programs is to use a certified service which meets the requirements of FAA AC 20-138D and FAA AC 90-105A for prediction.

The following table describes some of the available RAIM prediction programs.

Prediction Program	Internet address or program details	Coverage Area
Garmin RAIM Prediction Tool	https://fly.garmin.com/fly-garmin/support/raim/	Worldwide
FAA Service Availability Prediction Tool	http://sapt.faa.gov	US Only
Flight Service Station	1-800-WXBRIEF https://www.1800wxbrief.com	US Only
AUGER GPS RAIM Prediction Tool	http://augur.ecacnav.com/augur/app/home	ECAC Airspace Only

Table 4 - RAIM Prediction Sources

This RAIM availability requirement is not necessary if SBAS coverage is confirmed to be available along the entire route of flight.

For flight planning purposes, for operations within the U.S. National Airspace System on RNP and RNAV procedures when SBAS signals are not available, the availability of GPS RAIM shall be confirmed for the intended route of flight. In the event of a predicted continuous loss of RAIM of more than five minutes for any part of the intended route of flight, the flight shall be delayed, canceled, or rerouted on a track where RAIM requirements can be met. The flight may also be re-planned using non-GPS based navigational capabilities.

For flight planning purposes for operations within European B-RNAV/RNAV-5 and P-RNAV airspace, if more than one satellite is scheduled to be out of service, then the availability of GPS RAIM shall be confirmed for the intended flight (route and time). In the event of a predicted continuous loss of RAIM of more than five minutes for any part of the intended flight, the flight shall be delayed, canceled, or rerouted on a track where RAIM requirements can be met.

Applicable to dual installations consisting of two Garmin GNSS units:

For flight planning purposes, for operations where the route requires Class II navigation the aircraft's operator or flight crew must use the Garmin RAIM Prediction program to demonstrate that there are no outages on the specified route that would prevent the Garmin GNSS navigation system to provide GPS Class II navigation in oceanic and

remote areas of operation that requires RNP-10, RNP-4, or RNP-2 oceanic/remote capability. If the Garmin RAIM Prediction program indicates fault exclusion (FDE) will be unavailable for more than 34 minutes in accordance with FAA Order 8400.12A for RNP-10 requirements, 25 minutes in accordance with FAA Order 8400.33 for RNP-4 requirements, or 5 minutes in accordance with FAA Order 8400.33 for RNP-2 oceanic/remote then the operation must be rescheduled when FDE is available.

Both Garmin GPS navigation receivers must be operating and providing GPS navigation guidance for operations requiring RNP-4, RNP-10, or RNP-2 oceanic/remote performance.

Whenever possible, RNP and RNAV routes including Standard Instrument Departures (SIDs), Standard Terminal Arrival (STAR), and enroute RNAV “Q” and RNAV “T” routes should be loaded into the flight plan from the database in their entirety, rather than loading route waypoints from the database into the flight plan individually. Selecting and inserting individual named fixes from the database is permitted, provided all fixes along the published route to be flown are inserted. Manual entry of waypoints using latitude/longitude or place/bearing is prohibited.

It is not acceptable to flight plan a required alternate airport based on RNAV(GPS) LP/LPV or LNAV/VNAV approach minimums. The required alternate airport must be flight planned using an LNAV approach minimums or available ground-based approach aid.

Navigation information is referenced to the WGS-84 reference system, and should only be used where the Aeronautical Information Publication (including electronic data and aeronautical charts) conform to WGS-84 or equivalent.

2.6 System Use

The only approved sources of course guidance are on the external CDI, HSI, or EHSI display. The moving map and CDI depiction on the GPS 175/GNC 355/GNX 375 display are for situational awareness only and are not approved for course guidance.

2.7 Applicable System Software

This AFMS/AFM is applicable to the software versions shown in Table 5.

The Main and GPS software versions are displayed on the start-up page immediately after power-on. All software versions displayed in Table 5 can be viewed on the System – System Status or Connex Setup pages.

Software Item	Software Version <i>(or later FAA Approved versions for this STC)</i>
Main SW Version	3.10
GPS SW Version	8.0
COM SW Version	2.30
XPDR SW Version	2.54
Flight Stream 510	2.50

Table 5 - Software Versions

2.8 Navigation Database

GPS/SBAS based IFR enroute, oceanic, and terminal navigation is prohibited unless the flight crew verifies and uses a valid, compatible, and current navigation database or verifies each waypoint for accuracy by reference to current approved data.

“GPS”, “or GPS”, and “RNAV (GPS)” instrument approaches using the Garmin navigation system are prohibited unless the flight crew verifies and uses the current navigation database. GPS based instrument approaches must be flown in accordance with an approved instrument approach procedure that is loaded from the navigation database.

Discrepancies that invalidate a procedure should be reported to Garmin International. The affected procedure is prohibited from being flown using data from the navigation database until a new navigation database is installed in the aircraft and verified that the discrepancy has been corrected. Navigation database discrepancies can be reported at FlyGarmin.com by selecting “Aviation Data Error Report.” Flight crew and operators can view navigation database alerts at FlyGarmin.com then select “NavData Alerts.”

If the navigation database cycle will change during flight, the flight crew must ensure the accuracy of navigation data, including suitability of navigation facilities used to define the routes and procedures for flight. If an amended chart affecting navigation data is published for the procedure, the database must not be used to conduct the procedure.

See Section 2.22 for limitations regarding database update procedures.

2.9 Ground Operations

Do not use SafeTaxi functions as the basis for ground maneuvering. SafeTaxi functions do not comply with the requirements of AC 120-76D and are not qualified to be used as an airport moving map display (AMMD). SafeTaxi is to be used by the flight crew to orient themselves on the airport surface to improve flight crew situational awareness during ground operations.

2.10 Instrument Approaches

- a) Instrument approaches using GPS guidance may only be conducted when the GPS 175/GNC 355/GNX 375 is operating in the approach mode. (LNAV, LNAV +V, L/VNAV, LPV, LP, or LP +V)
- b) When conducting instrument approaches referenced to true North, the NAV Angle on the System -Units page must be set to **True**.
- c) The navigation equipment required to join and fly an instrument approach procedure is indicated by the title of the procedure and notes on the IAP chart. Navigating the final approach segment (that segment from the final approach fix to the missed approach point) of an ILS, LOC, LOC-BC, LDA, SDF, MLS, VOR, TACAN approach, or any other type of approach not approved for GPS, is not authorized with GPS navigation guidance. GPS guidance can only be used for approach procedures with GPS or RNAV in the procedure title. When using the VOR or ADF receiver to fly the final approach segment of a VOR or NDB approach, GPS may be the selected navigation source so long as the VOR or NDB station is operational and the signal is monitored for final approach segment alignment.
- d) Advisory vertical guidance deviation is provided when the GPS 175/GNC 355/GNX 375 annunciates LNAV + V or LP +V. Vertical guidance information displayed on the VDI in this mode is only an aid to help flight crews comply with altitude restrictions. When using advisory vertical guidance, the flight crew must use the primary barometric altimeter to ensure compliance with all altitude restrictions.
- e) Not all published Instrument Approach Procedures (IAP) are in the navigation database. Flight crews planning to fly an RNAV instrument approach must ensure that the navigation database contains the planned RNAV Instrument Approach Procedure and that approach procedure must be loaded from the navigation database into the GPS 175/GNC 355/GNX 375 system flight plan by its name. Pilots are prohibited from flying any approach path that contains manually entered waypoints.
- f) IFR approaches are prohibited whenever any physical or visual obstruction (such as a throw-over yoke) restricts pilot view or access to the GPS 175/GNC 355/GNX 375 and/or the CDI.

2.11 RF Legs

This STC does not grant operational approval for RF leg navigation for those operators requiring operational approval. Additional FAA approval may be required for those aircraft intending to use the GPS 175/GNC 355/GNX 375 as a means to provide RNP 1 navigation in accordance with FAA Advisory Circular AC 90-105A.

The following limitations apply to procedures with RF legs:

- Aircraft is limited to 180 KIAS while on the RF leg
- RF legs are limited to RNP 1 procedures. RNP AR and RNP <1 are not approved
- Primary navigation guidance on RF legs must be shown on an EHSI indicator with auto-slew capability turned ON
- GPS 175/GNC 355/GNX 375 Moving Map, EHSI Map, or Distance to Next Waypoint information must be displayed to the pilot during the RF leg when flying without the aid of the autopilot or flight director.
- The active waypoint must be displayed in the pilot's primary field of view.

2.12 Autopilot Coupling

The flight crew may fly all phases of flight based on the navigation information presented to the flight crew; however, not all modes may be coupled to the autopilot. All autopilots may be coupled in Oceanic (OCN), Enroute (ENR), and Terminal (TERM) modes.

This installation is limited to:

- Lateral coupling only for GPS approaches. Coupling to the vertical path for GPS approaches is not authorized.

It is possible to create flight plan waypoint sequences, which exceed the autopilot's bank angle capabilities. The pilot shall monitor autopilot performance with regard to flight path deviation.

2.12.1 RNP 1.0 RF Leg Types

AC 90-105A states that procedures with RF legs must be flown using either a flight director or coupled to the autopilot.

Garmin has demonstrated acceptable crew workload and Flight Technical Error for hand flown procedures with RF legs when the installation complies with limitation set forth in Section 2.11 of this document. It is recommended to couple the autopilot for RF procedures, if available, but it is not required to do so. See Section 4.5 of this manual to determine if this capability is supported in this installation.

2.13 Terrain Alerting Function

Terrain, point obstacle, and wire obstacle information appears on the map and terrain display pages as red and amber terrain, obstacles, or wires and is depicted for advisory use only. Aircraft maneuvers and navigation must not be predicated upon the use of the terrain display. Terrain, obstacle and wire information is advisory only and is not equivalent to warnings provided by TAWS.

The terrain display is intended to serve as a situational awareness tool only. By itself, it may not provide either the accuracy or the fidelity on which to base decisions and plan maneuvers to avoid terrain or obstacles.

2.14 Polar Operations

Use of the GPS 175/GNC 355/GNX 375 for primary navigation for latitudes above 89.00° N and below 89.00° S is prohibited.

2.15 ADS-B Weather (Optional for GPS 175/GNC355)

This limitation applies to datalink weather products from FIS-B via a GDL 88, GTX 345, or the internal transponder in a GNX 375.

Do not use data link weather information for maneuvering in, near, or around areas of hazardous weather. Information provided by data link weather products may not accurately depict current weather conditions.

Do not use the indicated data link weather product age to determine the age of the weather information shown by the data link weather product. Due to time delays inherent in gathering and processing weather data for data link transmission, the weather information shown by the data link weather product may be significantly older than the indicated weather product age.

Do not rely solely upon data link services to provide Temporary Flight Restriction (TFR) or Notice to Airmen (NOTAM) information. Not all TFRs and NOTAMS can be depicted on the GPS 175/GNC 355/GNX 375.

Datalink text weather is decoded for the convenience of the pilot, however it is possible that the decoding may be affected by anomalies in the data or differences in the units of measure between the decoding system and the text weather source. All text weather displayed on the GPS 175/GNC 355/GNX 375 also includes the raw weather text for pilot review.

2.16 Traffic Display (Optional for GPS 175/GNC355)

Traffic is displayed on the GNX 375, and may be displayed on the GPS 175 when connected to an approved optional ADS-B traffic device. These systems are capable of providing traffic monitoring and alerting to the flight crew. Traffic shown on the display may or may not have traffic alerting available. The display of traffic is an aid to visual acquisition and may not be utilized for aircraft maneuvering.

Traffic is displayed in feet regardless of the unit settings.

2.17 Flight Planner/Calculator Functions

The Fuel Planning page uses Fuel on Board as entered by the pilot when on the Fuel Planning page. This *is not* a direct indication of actual aircraft fuel on board and those values are only used for the Fuel Planning page. The fuel required to destination is only a calculated and predicted value based on the data entered into the planner. It is not a direct indication of how much fuel the aircraft will have upon reaching the destination.

2.18 Glove Use / Covered Fingers

No device may be used to cover fingers used to operate the GPS 175/GNC 355/GNX 375 unless the Glove Qualification Procedure located in the Pilot's Guide has been successfully completed. The Glove Qualification Procedure is specific to a pilot / glove / GPS 175/GNC 355/GNX 375 combinations.

2.19 Demo Mode

Demo mode may not be used in flight under any circumstances.

2.20 Wire Obstacle Database

Only the "Obstacle/HOT Line" database may be used. Use of the "Obstacle/Wire" database is prohibited. The database version can be viewed on the start-up database verification or System- System Status pages.

2.21 Portable Electronic Devices

This STC does not relieve the operator from complying with the requirements of 91.21 or any other operational regulation regarding portable electronic devices.

The bluetooth interface and data provided to a portable electronic device is not approved to replace any aircraft display equipment, including navigation or traffic/weather display equipment.

2.22 Database Updates

Database updates via MMC / SD card or Flight Stream wireless transfers must be done while the aircraft is on the ground and stationary. In-flight database transfers or updates are prohibited unless part of the Database SYNC function that occurs in the background to move databases from one LRU to another.

2.23 OBS Mode

Use of OBS mode for flight plan segments greater than 250_{NM} is prohibited. OBS Mode is not available between the FAF and MAP of any instrument approach.

2.24 Advisory Visual Approaches

All advisory visual approaches shall be conducted in VMC. Advisory visual approaches are intended to be used as an aid to situational awareness and do not guarantee terrain or obstruction clearance along the approach path. Use of advisory visual approaches in IMC is prohibited.

2.25 Placards

The GPS 175/GNC 355/GNX 375 STC adds placards if required per STC Installation Manual. The wording and locations of the placards are listed in the table below.

Placard	Location (If installed)
“TO/FROM FLAG WILL NOT FUNCTION CORRECTLY WHEN DISPLAYING GPS DEVIATION. USE TO/FROM INDICATION ON GPS”	Immediately adjacent to the composite CDI indicator.
“GPS LIMITED TO VFR USE ONLY”	Immediately adjacent to the GPS 175/GNC 355/GNX 375.

Table 6 - STC Placards

- A placard for composite indicators is installed.
- A placard for VFR only operations is installed.
- No placards are installed as a result of this STC.

Section 3. EMERGENCY PROCEDURES

3.1 Emergency Procedures

3.1.1 Terrain WARNING

Red annunciator “PULL UP”:

Autopilot..... **DISCONNECT**
Aircraft Controls..... **INITIATE MAXIMUM POWER CLIMB**
Airspeed..... **BEST ANGLE OF CLIMB SPEED**

After Warning Ceases:

Altitude..... **CLIMB AND MAINTAIN SAFE ALTITUDE**
Advise ATC of Altitude Deviation, if appropriate.

NOTE

Only vertical maneuvers are recommended, unless either operating in visual meteorological conditions (VMC), or the flight crew determines, based on all available information, that turning in addition to the vertical escape maneuver is the safest course of action, or both.

NOTE

Terrain annunciators external to the GPS 175/GNC 355/GNX 375 may not indicate the exact threat causing the alert. Example: WIRE alerts may be annunciated as TERR or OBSTACLE on external devices.

3.2 Abnormal Procedures

3.2.1 LOSS OF GPS/SBAS NAVIGATION DATA

When the GPS/SBAS receiver is inoperative or GPS navigation information is not available or invalid, the GPS 175/GNC 355/GNX 375 will enter one of two modes: Dead Reckoning mode (DR) or Loss Of Integrity mode (LOI). The mode is indicated on the GPS 175/GNC 355/GNX 375 by an amber “DR” and/or “LOI”.

If the LOI annunciation is displayed, revert to an alternate means of navigation appropriate to the route and phase of flight. If LOI occurs while the GPS 175/GNC 355/GNX 375 is in the ENR or OCN phase of flight, it may also display DR.

If the DR annunciation is displayed, the map will continue to be displayed with an amber “DR” overwriting the ownship icon. Course guidance will be removed on the CDI. Aircraft position will be based upon the last valid GPS position, then estimated by Dead Reckoning methods. Changes in true airspeed, altitude, heading, or winds aloft can affect the estimated position substantially.

With a GNX 375, loss of GPS will result in the loss of ADS-B Out transmissions.

If Alternate Navigation Sources (ILS, LOC, VOR, DME, ADF) Are Available:

Navigation..... **USE ALTERNATE SOURCES**

If No Alternate Navigation Sources Are Available:

DEAD RECKONING (DR) MODE:

Navigation..... **USE GPS 175/GNC 355/GNX 375**

NOTE

All information normally derived from GPS will become less accurate over time.

LOSS OF INTEGRITY (LOI) MODE (no DR annunciated on the GPS 175/GNC 355/GNX 375):

Navigation..... **FLY TOWARDS KNOWN VISUAL CONDITIONS**

NOTE

All information derived from GPS will be removed.

NOTE

The airplane symbol is removed from all maps. The map will remain centered at the last known position. “NO GPS POSITION” will be annunciated in the center of the map.

3.2.2 GPS APPROACH DOWNGRADE

During a LPV, LP +V, LNAV/VNAV, or LNAV +V approach, if GPS accuracy requirements cannot be met by the GPS receiver, the GPS 175/GNC 355/GNX 375 will downgrade the approach. The downgrade will remove vertical deviation indication from the VDI and change the approach annunciation to LNAV. The approach may be continued using the LNAV only minimums. If the VISUAL approach is downgraded, the GPS 175/GNC 355/GNX 375 will remove the vertical deviation indication from the VDI, but continue to annunciate VISUAL in amber.

During a GPS approach in which GPS accuracy requirements cannot be met by the GPS receiver for any GPS approach type, the GPS 175/GNC 355/GNX 375 will flag all CDI guidance and display a system message “ABORT APPROACH-GPS approach no longer available”. Immediately upon viewing the message, the unit will revert to Terminal navigation mode alarm limits. If the position integrity is within these limits lateral guidance will be restored and the GPS may be used to execute the missed approach, otherwise alternate means of navigation must be utilized.

3.2.3 Terrain CAUTION (Terrain or Obstacle Ahead, Sink Rate, Don’t Sink)

When a terrain CAUTION occurs, take corrective action until the alert ceases. Stop descending or initiate either a climb or a turn, or both as necessary, based on analysis of all available instruments and information.

NOTE

Terrain annunciators external to the GPS 175/GNC 355/GNX 375 may not indicate the exact threat causing the alert. Example: WIRE alerts may be annunciated as TERR or OBSTACLE on external devices.

3.2.4 Terrain INHIBIT

The Forward Looking Terrain Avoidance (FLTA) and Premature Descent Alerts (PDA) functions may be inhibited to prevent alerting, if desired. Refer to GPS 175/GNC 355/GNX 375 Pilot’s Guide for additional information.

To Inhibit Terrain Alerting:

- Home Hardkey **PRESS**
- Terrain Button **PRESS**
- Menu Button **PRESS**

3.2.5 TER N/A and TER FAIL

If the amber **TER N/A** or **TER FAIL** status annunciator is displayed, the system will no longer provide terrain alerting or display relative terrain and obstacle elevations. The crew must maintain compliance with procedures that ensure minimum terrain and obstacle separation.

3.2.6 DATA SOURCE - HEADING SOURCE INOPERATIVE OR CONNECTION LOST MESSAGE

Without a heading source to the GPS 175/GNC 355/GNX 375, the following limitations apply:

- Roll steering will not be provided to the autopilot for heading legs. The autopilot must be placed in HDG mode for heading legs.
- Map cannot be oriented to Heading Up.
- Overlaying traffic data from Garmin ADS-B-IN unit will not be displayed on the main map display. The flight crew must use the dedicated traffic page on the GPS 175/GNC 355/GNX 375 system to display ADS-B-IN traffic data.

3.2.7 DATA SOURCE – PRESSURE ALTITUDE SOURCE INOPERATIVE OR CONNECTION TO GNX 375 LOST MESSAGE

The GNX 375 will not be receiving pressure altitude while that message is present.

3.2.8 UNRECOVERABLE LOSS OF ALL ELECTRICAL GENERATORS OR ALTERNATORS

Remove power from all equipment which is not necessary for flight.

3.2.9 IN-AIR RESTART OF GPS 175/GNC 355/GNX 375

In the event of a GPS 175/GNC 355/GNX 375 restart in the air, the crew should utilize the Back button if presented with the database update screen after the GPS 175/GNC 355/GNX 375 is restarted. This will ensure restoration of the navigation functions as soon as possible.

Section 4. NORMAL PROCEDURES

Refer to the GPS 175/GNC 355/GNX 375 Pilot's Guide defined in Section 7.1 of this document for normal operating procedures and a complete list of system messages and associated flight crew actions. This includes all GPS operations, navigation, traffic, weather, and Multi-Function Display information.

The GPS 175/GNC 355/GNX 375 requires a reasonable degree of familiarity to avoid becoming too engrossed at the expense of basic instrument flying in IMC and basic see-and-avoid in VMC. Garmin provides training tools with the Pilot's Guide and PC based simulator. Pilots should take full advantage of these training tools to enhance system familiarization.

4.1 Unit Power On

Databases **REVIEW DATES**
Self-Test..... **VERIFY OUTPUTS TO NAV INDICATORS**
Self-Test - GPS Remote Annunciator:
 LOI **ILLUMINATED**
 APPR **ILLUMINATED**

For GNX 375:

Transponder Mode..... **VERIFY ALT**

4.2 Before Takeoff

System Messages and Annunciators **CONSIDERED**

4.3 HSI and EHSI Operation

If an HSI is used to display navigation data from the GPS 175/GNC 355/GNX 375 the pilot should rotate the course pointer as prompted on the GPS 175/GNC 355/GNX 375.

If an EHSI is used to display navigation data from the GPS 175/GNC 355/GNX 375 the course pointer may autoslew to the correct course when using GPS navigation. For detailed information about the functionality of the EHSI system, refer to the FAA approved Flight Manual or Flight Manual Supplement for that system.

CAUTION

The pilot must verify the active course and waypoint for each flight plan leg. The pilot must verify proper course selection each time the CDI source is changed from GPS to VLOC.

See Section 4.5 for RF leg capabilities related to EHSI.

4.4 Autopilot Operation

The GPS 175/GNC 355/GNX 375 may be coupled to an optional autopilot, if installed in the aircraft, when operating as prescribed in the LIMITATIONS section of this manual.

Autopilots coupled to the GPS 175/GNC 355/GNX 375 system in an analog (NAV) mode will follow GPS navigation guidance as they would with existing VOR receivers.

Autopilots that support GPSS or GPS Roll Steering in addition to the analog course guidance will lead course changes, fly arcing procedures, procedure turns, and holding patterns if coupled in a roll steering mode.

The GPS 175/GNC 355/GNX 375 supports autopilot roll steering for heading legs when an approved heading source is interfaced to the GPS 175/GNC 355/GNX 375. This heading interface can also provide map orientation, traffic heading data, and wind calculations.

CAUTION

The GPS 175/GNC 355/GNX 375 does not provide course deviation to the autopilot for heading legs. Some autopilots do not allow the use of roll steering when course deviation is not provided.

- This installation *has* a heading source. The GPS 175/GNC 355/GNX 375 will provide roll steering on heading legs for the autopilot.
- This installation *does not have* a heading source. The crew cannot use the GPS 175/GNC 355/GNX 375 roll steering to fly heading legs with the autopilot.

For autopilot operating instructions, refer to the FAA approved Flight Manual or Flight Manual Supplement for the autopilot.

4.5 Coupling the Autopilot during approaches

CAUTION

When the CDI source is changed on the GPS 175/GNC 355/GNX 375, autopilot mode may change. Confirm autopilot mode selection after CDI source change on the GPS 175/GNC 355/GNX 375. Refer to the FAA approved Flight Manual or Flight Manual Supplement for the autopilot.

Analog only autopilots should use APR mode for coupling to LNAV approaches. Autopilots which support digital roll steering commands (GPSS) may utilize NAV mode and take advantage of the digital tracking during LNAV only approaches.

- This installation prompts the flight crew and requires the pilot to enable the approach outputs just prior to engaging the autopilot in APR mode.

To couple an approach:

Once established on the final approach course with the final approach fix as the active waypoint, the GPS 175/GNC 355/GNX 375 will issue a flashing message indication.

Flashing Message Button.....**PRESS**
“Enable APR Output” Button.....**PRESS**

If coupled, Autopilot will revert to ROL mode at this time.

Autopilot..... **ENGAGE APPROACH MODE**

- This installation supports coupling to the autopilot in approach mode once vertical guidance is available.

To couple an approach:

Once established on the final approach course with the final approach fix as the active waypoint, the GPS 175/GNC 355/GNX 375 will enable vertical guidance.

Vertical Guidance **CONFIRM AVAILABLE**
Autopilot..... **ENGAGE APPROACH MODE**

- The installation *does not* support any vertical capture or vertical tracking.

The GPS 175/GNC 355/GNX 375 allows for the utilization of IFR procedures that include RF (Radius to Fix) legs as part of RNP 1.0 capabilities.

- This installation is equipped to support coupled RF leg navigation up to RNP 1.0.
- This installation is equipped to support *un-coupled* RF leg navigation up to RNP 1.0.
- This installation *does not* support RF leg navigation.

4.6 Composite Indicators

When the GPS 175/GNC 355/GNX 375 is interfaced to an existing composite CDI indicator, the TO/From Flag will not function on the indicator. A placard must be installed immediately adjacent to the indicator. The placard must read: “TO/FROM FLAG WILL NOT FUNCTION CORRECTLY WHEN DISPLAYING GPS DEVIATION. USE TO/FROM INDICATION ON GPS.” The following navigation indicators require the placard:

- Narco VOA 50M
- Narco VOA 9
- Narco VOA 8
- ARC (Cessna) IN-386A
- ARC (Cessna) IN-481AC
- ARC (Cessna) IN-385AC
- Honeywell (Bendix King) KI 204
- Honeywell (Bendix King) KI 209
- Honeywell (Bendix King) KI 209A
- Bendix King KI 203
- Bendix King KI 208
- Bendix King KI 208A

These indicators will either show no To/From indication at all, or will only show the “TO” indication. Pilots must use the on screen TO/FROM indications when interfaced to these CDIs.

- This installation is interfaced to a composite navigation indicator and the TO/FROM flag on the indicator *will not* function correctly.
- This installation *is not* interfaced to a composite nav indicator.

Pilot should set the selected course on the CDI to the desired track.

Section 5. PERFORMANCE

No change.

Section 6. WEIGHT AND BALANCE

See current weight and balance data.

Section 7. SYSTEM DESCRIPTIONS

7.1 Pilot's Guide

The Garmin GPS 175/GNC 355/GNX 375 Pilot's Guides, part number and revision listed below, contain additional information regarding GPS 175/GNC 355/GNX 375 system description, control and function.

- GPS175/GNX375 Pilot's Guide P/N 190-02207-02 Rev B or later
- GPS175/GNC 355/GNX375 Pilot's Guide P/N 190-02488-01 Rev B or later

7.2 Leg Sequencing

The GPS 175/GNC 355/GNX 375 supports all ARINC 424 leg types. Certain leg types require altitude input in order to sequence (course to altitude, for example). If a barometric corrected altitude source is not interfaced to the GPS 175/GNC 355/GNX 375, a popup will appear prompting the flight crew to manually sequence the leg once the altitude prescribed in the procedure is reached.

- This installation *has* a barometric corrected altitude source. The GPS 175/GNC 355/GNX 375 will automatically sequence altitude legs.
- This installation *does not have* a barometric corrected altitude source. The flight crew will be prompted to manually sequence altitude legs.

7.3 Terrain Alerting

CAUTION

Not all obstacles and wires are contained in the Obstacle/HOT Line database. The system provides depiction and alerts only for obstacles and wires contained in the database.

NOTE

The area of coverage may be modified as additional terrain data sources become available.

The GPS 175/GNC 355/GNX 375 supports Terrain Alerting. Visual alerts are provided. Terrain Alerting *does not* satisfy the TAWS requirement of 91.223.

Terrain on the dedicated terrain page or main map overlay is depicted in the following manner:

- Terrain more than 1,000 feet below the aircraft is not depicted or depicted as black.
- Terrain between 1,000 feet and 100 feet below the aircraft is depicted as amber.
- Terrain within 100 feet below the aircraft, or above the aircraft, is depicted as red.

Obstacles and wires on the dedicated terrain page or main map are depicted in the following manner:

- Obstacles and wires more than 2,000 feet below the aircraft are not depicted.
- Obstacles and wires between 2,000 feet and 1,000 feet below the aircraft are depicted as white.
- Obstacles and wires between 1,000 feet and 100 feet below the aircraft are depicted as amber.
- Obstacles and wires within 100 feet below the aircraft, or above the aircraft, are depicted as red.

Multiple obstacles may be depicted using a single obstacle icon and an asterisk to indicate obstacle grouping is occurring. The color of the asterisk indicates the relative altitude of the tallest obstacle in the group. The asterisk does not indicate any information about the relative altitude or number of obstacles not being displayed in the obstacle group.

The Garmin GPS 175/GNC 355/GNX 375 Pilot's Guide provides additional information regarding terrain and obstacle colors and grouped obstacle icons.

The terrain alerting is inhibited in the vicinity of airports in the navigation database. If an airport is not in the database, terrain alerting will still occur. Airports not in the database will not be viewable as airports in the unit. If flying into an airport that is not in the database, the inhibit terrain feature can be used to prevent alerting. The terrain inhibit option is in the menu on the terrain page, and provides a means to prevent all terrain alerts while inhibited. The bottom status bar of the GPS 175/GNC 355/GNX 375 will display TER INHB, and a message will persist in the message window indicating that the terrain alerts are inhibited.

7.4 Traffic System (Optional for GPS 175/GNC355)

This system is configured for the following type of traffic system. The Garmin GPS 175/GNC 355/GNX 375 Pilot's Guide provides additional information regarding the functionality of the traffic device.

- GPS 175/GNC 355 with no external traffic source.
- GPS 175/GNC 355 with external ADS-B In Source.
- GNX 375 including built in ADS-B In Source.

7.5 Power

- Power to the GPS 175 or GNC 355 is provided through a circuit breaker labeled GPS or GPS 2.
- Power to the GNX 375 is provided through a circuit breaker labeled GPS/XPDR or GPS/XPDR 2.
- Power to the COM radio in a GNC 355 is provided through a circuit breaker labeled COM or COM2.

- Power to the optional Flight Stream 510 is provided through the GPS 175/GNC 355/GNX 375 MMC/SD card slot and protected via the GPS 175/GNC 355/GNX 375 circuit breaker.

7.6 Databases and Flight Plan Waypoints/Procedures

Database versions (or cycles) and effective dates are displayed on the start-up database verification page immediately after power-on for those databases with an effective or expiration date. Databases with no effective or expiration date (e.g. - terrain database) are considered effective upon installation in the GPS 175/GNC 355/GNX 375. Database information can also be viewed on the System – System Status page.

The Obstacle Database has an area of coverage that includes the United States and Europe and is updated as frequently as every 56 days. The HOT Line wire database only includes the continental United States and portions of Canada/Mexico.

Only the Obstacle/HOT Line wire database may be used in accordance with the limitation found in Section 2.20.

If a stored flight plan contains a waypoint or procedure that does not correspond to a waypoint or procedure in the navigation database in use, the waypoint or procedure will become locked (depicted as “lockd”) in the flight plan. Flight plans with locked waypoints may be placed in the active flight plan portion of the system but no navigation will be provided. The locked waypoint/procedure must be resolved by removing or replacing it with the correct waypoint/procedures in the flight plan before the system will provide navigation.

7.7 External Switches

External switches may be installed and interfaced to the GPS 175/GNC 355/GNX 375. Table 7 lists the switches and function they perform:

Switch Label	Function
TFC MUTE	Mutes the traffic alert audio (GNX 375 only)
GA	Remote Go Around
IDENT	Transponder IDENT

Table 7 – External Switches

7.8 Airspace Depiction and Alerts

The GPS 175/GNC 355/GNX 375 aides the flight crew in avoiding certain airspaces with Smart Airspace and airspace alerts. Smart Airspace de-emphasizes depicted airspace that is not near the aircraft's current altitude. Airspace Alerts provide a message indication to the flight crew when the aircraft's current ground track will intercept an airspace type that has been selected for alerting.

NOTE

Smart Airspace and Airspace Alerts are separate features. Turning on/off Smart Airspace does not affect Airspace Alerts, and vice versa.

7.9 ADS-B Traffic (Optional for GPS 175/GNC355)

The GNX 375 has a built in ADS-B In traffic system. A Garmin ADS-B traffic system may be interfaced to the GPS 175/GNC 355/GNX 375. The *nose* of the ownship symbol on the GPS 175/GNC 355/GNX 375 main map page and dedicated traffic page serves as the actual location of your aircraft. The *center* of the traffic target icon serves as the reported location for the target aircraft. Motion vectors for traffic may be displayed in either absolute or relative motion. The location of the traffic targets relative to the ownship are the same, regardless of the selected motion vector.

Absolute motion vectors are colored either cyan or white, depending on unit configuration. Absolute motion vectors depict the reported track of the traffic target referenced to the ground. An absolute motion vector pointed towards your ownship symbol *does not* necessarily mean the traffic target is getting closer to your aircraft.

Relative motion vectors are always colored green and depict the motion of the traffic target relative to your ownship symbol. The direction the traffic target is pointed may vary greatly from the motion vector and a target may be getting closer to your aircraft independent of the direction the target is pointed. A green relative motion vector pointed towards your ownship indicates that the traffic target *is* converging on your aircraft.

Traffic grouping can be enabled or disabled in the traffic page menu. If grouping is enabled, and more than one target is occupying the same area of the screen, the GPS 175/GNC 355/GNX 375 will combine the two or more traffic targets into one traffic group. The presence of an asterisk to the left of a target indicates that traffic has been grouped. The highest priority traffic target in the group is displayed to the pilot. When applied to airborne targets the asterisk will be displayed in white or cyan depending on the traffic depiction color used in the installation. The asterisk will be brown for grouped ground targets. The asterisk will not turn amber, even if an alerted target is included in the group. If traffic grouping is disabled, the traffic targets will draw on top of one another.

An alerted target may be placed in the same group as non-alerted targets. In this case, the alerted target will be displayed. Two alerted targets will not be placed in the same group. All alerted targets will be displayed on the screen.

Traffic targets displayed on the dedicated traffic page may be selected in order to obtain additional information about a traffic target or to view all targets in a grouped target. When a grouped target is selected, the “Next” button on the dedicated traffic page will cycle through all targets located in close proximity to where the screen has been touched.

7.10 Transponder Control (GNX 375 Only)

The GNX 375 has a built in transponder with on screen controls for squawk code, mode, and additional transponder functions. The transponder is a 1090ES out, and 1090/UAT In device.

7.11 Depiction of Obstacles and Wires

7.11.1 Dedicated Terrain Page

The dedicated Terrain page will always depict point obstacles at zoom scales of 10 nm or less and depict wire obstacles at zoom scales of 5 nm or less. The obstacle or wire overlay icon (see Figure 4) will be shown near the bottom of the display when the obstacle or wire depiction is active based on the zoom scale.

NOTE

Only obstacles and wires within 2,000 feet vertically of the aircraft will be drawn on the Terrain page. It is therefore possible to have an obstacle or wire overlay icon displayed with no obstacles or wires being depicted on the display.




Figure 4 – Obstacle Overlay Icon (Left), Wire Overlay Icon (Right)

7.11.2 Map Page

The Map page may be configured to depict point obstacles and wire obstacles at various zoom scales by the pilot by using the Map page menu. The obstacle or wire overlay icon (see Figure 5) will be shown near the bottom of the display when the obstacle or wire overlay is active based on the current zoom scale and setting selected by the pilot.

The settings chosen by the pilot on the Map page menu (including obstacle and wire display ranges) are saved over a power cycle.

NOTE

Only obstacles and wires within 2,000 feet vertically of the aircraft will be drawn on the Map page. It is therefore possible to have an obstacle or wire overlay icon displayed with no obstacles or wires being depicted on the display.

NOTE

The Map page may be configured by the pilot to not show any obstacles or wires at any zoom scale.



Figure 5 – Obstacle Overlay Icon (Left), Wire Overlay Icon (Right)

7.12 Flight Stream 510 (Optional)

The Flight Stream 510 is mounted in the GPS 175/GNC 355/GNX 375 SD card slot and includes a Wi-Fi transceiver. The Flight Stream product line uses a wireless transceiver to allow databases to be loaded onto the GPS 175/GNC 355/GNX 375 from a personal electronic devices (PEDs). Limitations regarding database operations are found in Section 2.22.

Garmin provides a list of tested and compatible devices that can be used with the Flight Stream. Connection to the Flight Stream may be possible with devices other than those on the supported device list, but Wi-Fi stability and wireless data integrity cannot be guaranteed.

For details about the Garmin supported devices and apps for use with the Flight Stream product line, please visit: http://garmin.com/connext/supported_devices

7.13 Built in Bluetooth

The GPS 175/GNC 355/GNX 375 have built in Bluetooth transceivers to allow PEDs to connect to the certified avionics. Data such as traffic, flight plan, datalink weather, and attitude information is sent from the GPS 175/GNC 355/GNX 375 to the PED. The PED is capable of sending flight plans to the GPS 175/GNC 355/GNX 375.

Garmin provides a list of tested and compatible devices that can be used with the GPS 175/GNC 355/GNX 375. Connection to the GPS 175/GNC 355/GNX 375 may be possible with devices other than those on the supported device list, but Bluetooth® stability and wireless data integrity cannot be guaranteed.

For details about the Garmin supported devices and apps for use with GPS 175/GNC 355/GNX 375 product line, please visit: <https://fly.garmin.com/fly-garmin/support/>

7.14 Map Page

7.14.1 Configuration

The moving map and weather pages are capable of displaying a large quantity and variety of data. Map data is layered to ensure that data which is typically more critical is drawn above less critical data, however at some zoom scales and configurations the map may be cluttered with large amounts of data. Controls are provided on the Map and Weather pages for the pilot to select which data displayed, the declutter level, and the zoom scales at which data is added to or removed from the display. It is the responsibility of the pilot to select settings for the map page that will provide the display of data most appropriate to the operation being conducted.

7.15 Flight Plan Depiction

The map page depicts the current active flight plan. When an off-route Direct To is active the flight plan will no longer be depicted on the map.

7.16 User Defined Waypoints

When a User Defined Waypoint is created, a default name will automatically be provided, and the pilot is given the option to enter a different name for the waypoint. Pages which have the autofill function will prevent some waypoint names from being used. If it is desired to name the waypoint with a subset of the name of an existing waypoint in the database then this must be accomplished on the Waypoint Info / User Waypoints page.

7.17 Times and Distances

Time and Distance data to the next waypoint is always calculated from the present position to that waypoint and does not account for the path which may be flown (such as intercepting a course) to reach the waypoint.

When navigating using GPS guidance most legs are TO type legs where distance to the next waypoint decreases along the route. However, some procedures include FROM type legs. When navigating on a leg that is a FROM leg indications that it is a FROM leg include the TO/FROM flag indicating FROM and distances increasing in distance fields.

7.18 Direct-To Operations

When conducting Direct-To operations the Flight Plan tab provides a list of waypoints in the flight plan for which Direct-To is available. Some entries in the flight plan such as Holds and Course Reversals are not eligible for Direct-To and the pilot must instead select the associated waypoint if Direct-To operation is desired.

7.19 European Visual Reporting Points

If the GPS 175/GNC 355/GNX 375 is interfaced with a G500/600 PFD/MFD, and a flight plan in the GPS 175/GNC 355/GNX 375 contains a VRP, the G500/600 must have a database that contains the VRP in order to appropriately display the VRP on the MFD map. If the database on the PFD/MFD does not contain the VRP, the VRP will display on the MFD map as an intersection.

7.20 Advisory Visual Approaches

The GPS 175/GNC 355/GNX 375 will provide advisory visual approaches to many runways in the aviation database. Lateral guidance for the visual approach is aligned with the runway bearing. Vertical guidance is provided for those runways with VGSI information for distances up to 4.0NM from the runway. If a terrain database is installed in the GPS 175/GNC 355/GNX 375, the GPS 175/GNC 355/GNX 375 provides vertical guidance up to 28NM from the runway end unless the computed glideslope would impact terrain or obstacles from the database. If the projected impact point is under 28NM and greater than 4NM, the flight plan line for the approach is shortened to indicate where vertical guidance is active for the approach. If the terrain impact point is less than 4NM from the runway and there is no VGSI data available, vertical guidance is not provided for that approach. Lateral guidance is still available when vertical guidance is removed.

CDI and VDI indications are equivalent to those of other GPS-based approaches (e.g.- LPV or LNAV+V). The GPS 175/GNC 355/GNX 375 annunciates “VISUAL” in the annunciator bar to indicate a visual approach is active.

When loading, or activating the approach, the GPA and TCH information for that approach will be displayed on a popup. If there is no vertical guidance available, the popup will display “(NO VERTICAL GUIDANCE)”.

Visual approaches are intended to be used as an aid to situational awareness. Visual approaches are advisory in nature and do not guarantee terrain and obstacle clearance for the approach runway.

7.21 Composite CDIs

When the GPS 175/GNC 355/GNX 375 is interfaced to a composite CDI indicator, the TO/From Flag will not function on the indicator, and a placard must be installed adjacent to the indicator. The placard must read: “TO/FROM FLAG WILL NOT FUNCTION CORRECTLY WHEN DISPLAYING GPS DEVIATION. USE TO/FROM INDICATION ON GPS.” and follow all placard guidelines in the Installation Manual.

These indicators will either show no To/From indication at all, or will only show the “TO” indication. Pilots must use the on screen TO/FROM indications when interfaced to these CDIs.



To/From Indication

Figure 6 - To/From Indication Location

7.22 Database Sync Compatibility

The GPS 175/GNC 355/GNX 375 units are capable of utilizing database sync completely between other GPS 175/GNC 355/GNX 375 units, as well as GI275 units. The GPS 175/GNC 355/GNX 375 are capable of a limited database sync from a G500 TXi and G600 TXi. Sync from the GPS 175/GNC 355/GNX 375 to the G500 TXi and G600 TXi is not supported.